

ATC 100 C Series Porcelain High RF Power Multilayer Capacitors

- Case C Size (.250" x .250")
- High Q
- Low ESR/ESL
- High RF Power
- Available with Encapsulation Option*
- Capacitance Range 1 pF to 2700 pF
- Ultra-Stable Performance
- High RF Current/Voltage
- High Reliability
- Extended WVDC up to 3600 VDC

ATC, the industry leader, offers new improved ESR/ESL performance for the 100 C Series RF Capacitors. This high Q multilayer capacitor is ultra-stable under high RF current and voltage applications. High density Porcelain construction provides a rugged, hermetic package.

ATC offers an encapsulation option for applications requiring extended protection against arc-over and corona.

Typical functional applications: Bypass, Coupling, Tuning, Impedance Matching and DC Blocking.

Typical circuit applications: VHF/UHF RF Power Amplifiers, Antenna Tuning, Plasma Chambers and Medical (MRI coils).

*For leaded styles only.

ENVIRONMENTAL TESTS

ATC 100 C Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.

THERMAL SHOCK:

MIL-STD-202, Method 107, Condition A.

MOISTURE RESISTANCE:

MIL-STD-202, Method 106.


LOW VOLTAGE HUMIDITY:

MIL-STD-202, Method 103, Condition A, with 1.5 Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.

LIFE TEST:

MIL-STD-202, Method 108, for 2000 hours, at 125°C. Voltage applied.

200% of WVDC for capacitors rated at 500 volts DC or less.
120% of WVDC for capacitors rated at 1250 volts DC or less.
100% of WVDC for capacitors rated above 1250 volts DC.

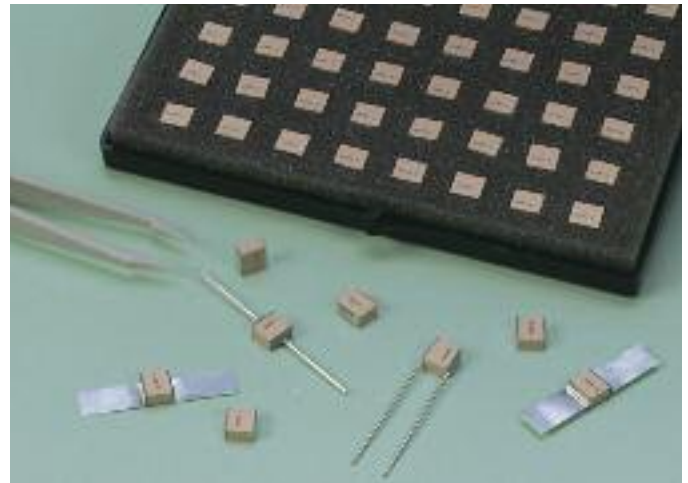

ELECTRICAL AND MECHANICAL SPECIFICATIONS

QUALITY FACTOR (Q):

Greater than 10,000 (1.0 pF to 1000 pF) @ 1 MHz.
Greater than 10,000 (1100 pF to 2700 pF) @ 1 KHz.

TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC):

+90 ±30 PPM/°C (-55°C to +125°C)

INSULATION RESISTANCE (IR):

1 pF to 2700 pF:

10⁵ Megohms min. @ +25°C at rated WVDC.

10⁴ Megohms min. @ +125°C at rated WVDC.

Max. test voltage is 500 VDC.

WORKING VOLTAGE (WVDC): See Capacitance Values Table, p 2.

DIELECTRIC WITHSTANDING VOLTAGE (DWV):

250% of WVDC for capacitors rated at 500 volts DC or less for 5 seconds.
150% of WVDC for capacitors rated at 1250 volts DC or less for 5 seconds.
120% of WVDC for capacitors rated above 1250 volts DC for 5 seconds.

RETRACE: Less than ±(0.02% or 0.02 pF), whichever is greater.

AGING EFFECTS: None

PIEZOELECTRIC EFFECTS: None

(No capacitance variation with voltage or pressure).

CAPACITANCE DRIFT: ±(0.02% or 0.02 pF), whichever is greater.

OPERATING TEMPERATURE RANGE:

From -55°C to +125°C (No derating of working voltage).

TERMINATION STYLES:

Available in various surface mount and leaded styles.
See Mechanical Configurations, page 3.

TERMINAL STRENGTH: Terminations for chips and pellets withstand a pull of 10 lbs. min., 20 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor. Test per MIL-STD-202, method 211.



AMERICAN

ATC North America
sales@atceramics.com

TECHNICAL

ATC Europe
saleseur@atceramics.com

CERAMICS

ATC Asia
sales@atceramics-asia.com

THE ENGINEERS' CHOICE™

www.atceramics.com

THE
ENGINEERS'
CHOICE®

ISO 9001 REGISTERED
COMPANY

ATC # 001-808 Rev. M, 1/17

ATC 100 C Capacitance Values

CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		
			STD.	EXT.				STD.	EXT.				STD.	EXT.				STD.	EXT.	
1R0	1.0				5R1	5.1				390	39				301	300				
1R1	1.1			EXTENDED VOLTAGE	5R6	5.6				430	43				331	330				
1R2	1.2				6R2	6.2					470	47				361	360			
1R3	1.3				6R8	6.8	B, C,				510	51				391	390	1500	2000	
1R4	1.4				7R5	7.5	D				560	56				431	430			EXT. VOLT.
1R5	1.5				8R2	8.2					620	62				471	470			
1R6	1.6				9R1	9.1					680	68				511	510			
1R7	1.7				100	10					750	75				561	560			
1R8	1.8				110	11					820	82				621	620			
1R9	1.9				120	12					910	91				681	680			
2R0	2.0	B, C, D	2500	3600	130	13		2500	3600	101	100	F, G, J K, M	2500		751	750				
2R1	2.1				150	15				111	110				821	820	1000	1500		
2R2	2.2				160	16				121	120				911	910			EXTENDED VOLTAGE	
2R4	2.4				180	18				131	130				102	1000				
2R7	2.7				200	20				151	150				112	1100				
3R0	3.0				220	22	F, G, J K, M			161	160				122	1200				
3R3	3.3				240	24				181	180				152	1500	500	800		
3R6	3.6				270	27				201	200				182	1800				
3R9	3.9				300	30				221	220				222	2200				
4R3	4.3				330	33				241	240				242	2400				
4R7	4.7				360	36				271	270				272	2700	300	500		


$VRMS = 0.707 \times WVDC$

• SPECIAL VALUES, TOLERANCES, HIGHER WVDC AND MATCHING AVAILABLE. • ENCAPSULATION OPTION AVAILABLE. PLEASE CONSULT FACTORY.

CAPACITANCE TOLERANCE

Code	B	C	D	F	G	J	K	M
Tol.	±0.1 pF	±0.25 pF	±0.5 pF	±1%	±2%	±5%	±10%	±20%

ATC PART NUMBER CODE

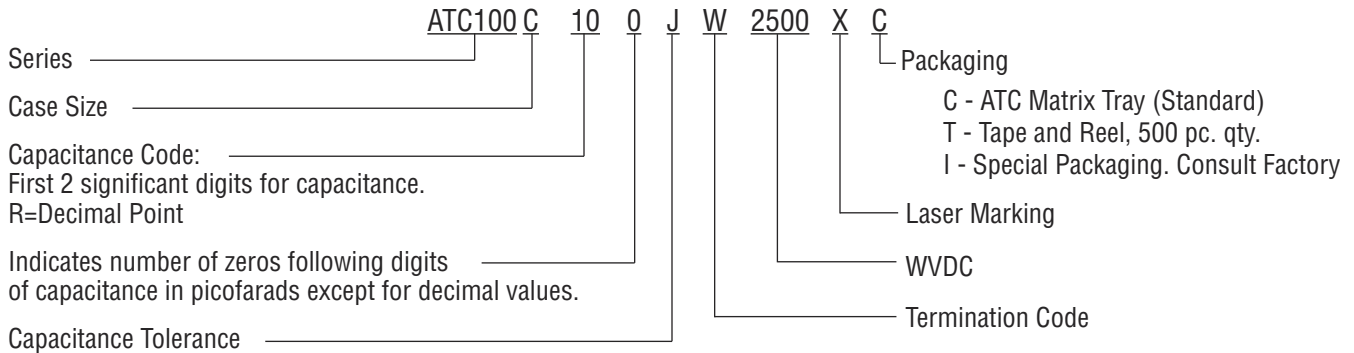

The above part number refers to a 100 C Series (case size C) 10 pF capacitor, J tolerance (±5%), 2500 WVDC, with W termination (Tin/Lead, Solder Plated over Nickel Barrier), laser marking and ATC Waffle-packaging.

ATC accepts orders for our parts using designations **with** or **without** the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at (+1-631) 622-4700.

Consult factory for additional performance data.





























A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com

ATC Asia
sales@atceramics-asia.com

ATC 100 C Capacitors: Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (MM)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIAL
100C	W	 C Solder Plate		.230 +0.020 -.010 (5.84 +0.51 -0.25)			.040 (1.02) max.	Tin/Lead, Solder Plated over Nickel Barrier Termination
100C	P	 C Pellet		.230 +0.025 -.010 (5.84 +0.64 -0.25)				Heavy Tin/Lead Coated, over Nickel Barrier Termination
100C	T	 C Solderable Nickel Barrier		.230 +0.020 -.010 (5.84 +0.51 -0.25)				RoHS Compliant Tin Plated over Nickel Barrier Termination
100C	CA	 C Gold Chip		.230 +0.020 -.010 (5.84 +0.51 -0.25)				RoHS Compliant Gold Plated over Nickel Barrier Termination
100C	MS	 C Microstrip			.250 ±0.015 (6.35 ±0.38)			High Purity Silver Leads L _L = .500 (12.7) min. W _L = .240 ±.005 (6.10 ±.127) T _L = .004 ±.001 (.102 ±.025) Leads are Attached with High Temperature Solder.
100C	AR	 C Axial Ribbon						High Purity Silver Leads L _L = .500 (12.7) min. W _L = .240 ±.005 (6.10 ±.127) T _L = .004 ±.001 (.102 ±.025) Leads are Attached with High Temperature Solder.
100C	AW	 C Axial Wire						High Purity Silver Leads L _L = .500 (12.7) min. W _L = .240 ±.005 (6.10 ±.127) T _L = .004 ±.001 (.102 ±.025) Leads are Attached with High Temperature Solder.
100C	VA	 C Vertical Axial Ribbon						High Purity Silver Leads L _L = .500 (12.7) min. W _L = .240 ±.005 (6.10 ±.127) T _L = .004 ±.001 (.102 ±.025) Leads are Attached with High Temperature Solder.
100C	RW	 C Radial Wire						High Purity Silver Leads L _L = .500 (12.7) min. W _L = .240 ±.005 (6.10 ±.127) T _L = .004 ±.001 (.102 ±.025) Leads are Attached with High Temperature Solder.
100C	MS	 C Microstrip						High Purity Silver Leads L _L = .500 (12.7) min. W _L = .240 ±.005 (6.10 ±.127) T _L = .004 ±.001 (.102 ±.025) Leads are Attached with High Temperature Solder.
100C	AR	 C Axial Ribbon						High Purity Silver Leads L _L = .500 (12.7) min. W _L = .240 ±.005 (6.10 ±.127) T _L = .004 ±.001 (.102 ±.025) Leads are Attached with High Temperature Solder.
100C	AW	 C Axial Wire						High Purity Silver Leads L _L = .500 (12.7) min. W _L = .240 ±.005 (6.10 ±.127) T _L = .004 ±.001 (.102 ±.025) Leads are Attached with High Temperature Solder.
100C	VA	 C Vertical Axial Ribbon						High Purity Silver Leads L _L = .500 (12.7) min. W _L = .240 ±.005 (6.10 ±.127) T _L = .004 ±.001 (.102 ±.025) Leads are Attached with High Temperature Solder.
100C	RW	 C Radial Wire						High Purity Silver Leads L _L = .500 (12.7) min. W _L = .240 ±.005 (6.10 ±.127) T _L = .004 ±.001 (.102 ±.025) Leads are Attached with High Temperature Solder.

Custom lead styles and lengths are available; consult factory. All leads are high purity silver attached with high temperature solder and are **RoHS** compliant.
 **W_L = .110 (2.79) for capacitance values ≤ 680 pF; W_L = .130 (3.30) for capacitance values > 680 pF









A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com


ATC Asia
sales@atceramics-asia.com

ATC 100 C Capacitors: Non-Magnetic Mechanical Configurations


ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS
100C	WN	 C Non-Mag Solder Plate		.230 +.025 -.010 (5.84 +.64 -.25)	.250 ±.015 (6.35 ±0.38)	.145 (3.68) max. for capacitance values ≤ 680 pF;	.040 (1.02) max.	Tin/Lead, Solder Plated over Non-Magnetic Barrier Termination
100C	PN	 C Non-Mag Pellet		.230 +.035 -.010 (5.84 +.89 -.25)				Heavy Tin/Lead Coated, over Non-Magnetic Barrier Termination
100C	TN	 C Non-Mag Solderable Barrier		.230 +.025 -.010 (5.84 +.64 -.25)				.165 (4.19) max. for capacitance values > 680 pF.
100C	MN	 C Non-Mag Microstrip		.245 ±.025 (6.22 ±0.64)				High Purity Silver Leads L _L = .500 (12.7) min. W _L = .240 ±.005 (6.10 ±.127) T _L = .004 ±.001 (.102 ±.025) Leads are Attached with High Temperature Solder.

Custom lead styles and lengths are available; consult factory. All leads are high purity silver attached with high temperature solder and are **RoHS** compliant.


Suggested Mounting Pad Dimensions



Horizontal
Electrode Orientation



Vertical
Electrode Orientation



Case C Vertical Mount

Cap Value	Pad Size	A Min.	B Min.	C Min.	D Min.
< 680 pF	Normal	.150	.050	.200	.300
	High Density	.130	.030	.200	.260
> 680 pF	Normal	.185	.050	.200	.300
	High Density	.165	.030	.200	.260

Horizontal Mount

All values	Pad Size	A Min.	B Min.	C Min.	D Min.
All values	Normal	.280	.050	.200	.300
	High Density	.260	.030	.200	.260

Dimensions are in inches.

A M E R I C A N T E C H N I C A L C E R A M I C S


ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com


ATC Asia
sales@atceramics-asia.com

ATC 100 C Performance Data


**ESR VS. CAPACITANCE
ATC SERIES 100, CASE C**

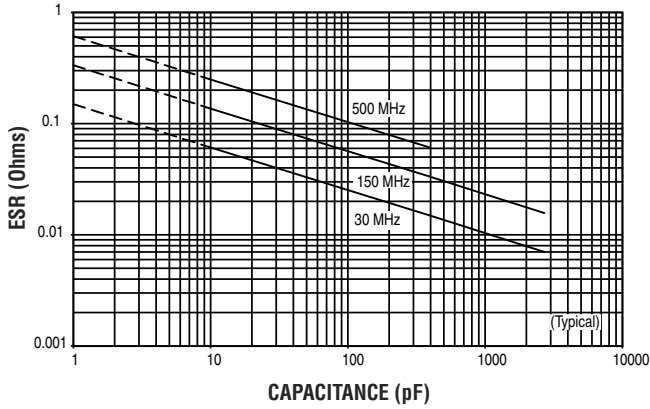


**Q VS. CAPACITANCE
ATC SERIES 100, CASE C**

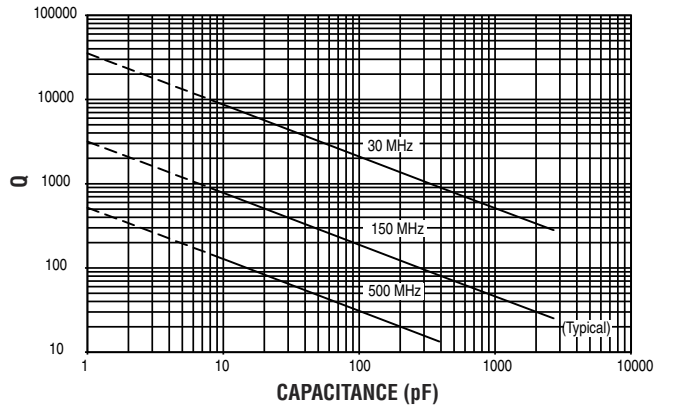


**SERIES RESONANCE VS. CAPACITANCE
ATC SERIES 100, CASE C**

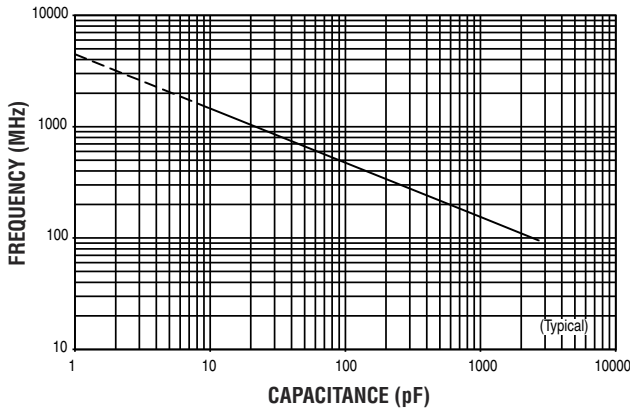


**CURRENT RATING VS. CAPACITANCE
ATC SERIES 100, CASE C**

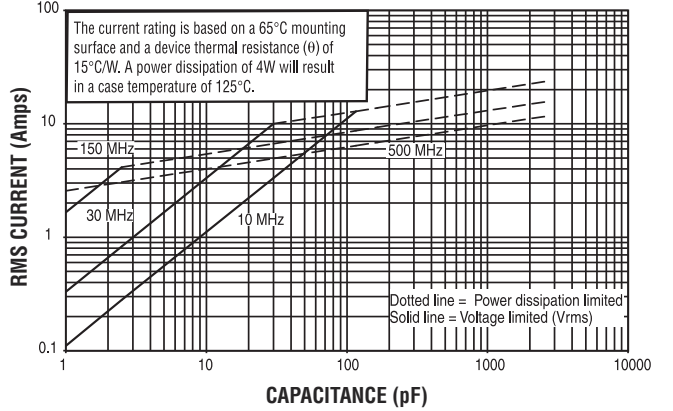

**CURRENT RATING VS. CAPACITANCE
ATC SERIES 100, CASE C, EXTENDED VOLTAGE**

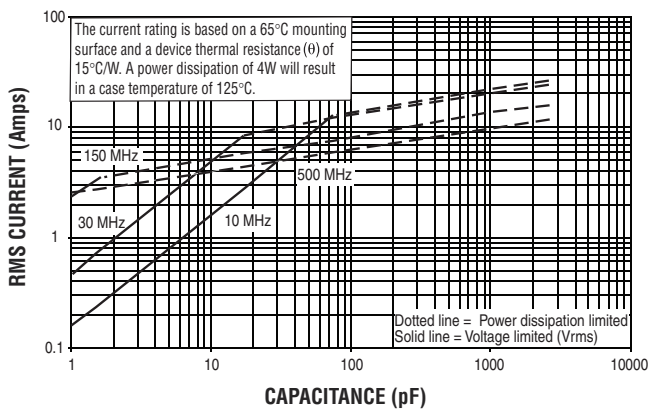

**CAPACITANCE CHANGE VS. TEMPERATURE
ATC SERIES 100, CASE C**

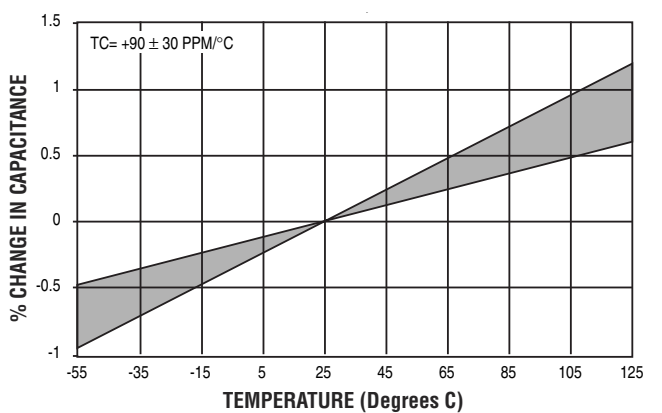

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com

ATC Asia
sales@atceramics-asia.com

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. B; 12/05). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at www.atceramics.com/productfinder/default.asp. Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.

© 1996 American Technical Ceramics Corp. All Rights Reserved.

ATC # 001-808 Rev. M 1/17



AMERICAN

ATC North America
sales@atceramics.com

TECHNICAL

ATC Europe
salseur@atceramics.com

CERAMICS

ATC Asia
sales@atceramics-asia.com

THE ENGINEERS' CHOICE™

www.atceramics.com



ISO 9001 REGISTERED
COMPANY